




## DC FAN Motor AG-series

## □40×40×28mm

Model	*Bearing System	Rated Voltage	Operating Voltage Range	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level	Weight
Part NO.	B / S / F	V	V	A	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dBA	g
AGB04028_12L	B	12	7.0~13.2	0.18	8000	0.39	13.9	11.6	0.46	40.0	40
AGB04028_12M	B	12	7.0~13.2	0.26	9500	0.45	15.9	17.6	0.69	42.0	40
AGB04028_24M	B	24	14.0~26.4	0.15	9500	0.45	15.9	17.6	0.69	42.0	40
AGB04028_12H	B	12	7.0~13.2	0.35	11000	0.53	18.7	23.4	0.92	48.0	40
AGB04028_24H	B	24	14.0~26.4	0.20	11000	0.53	18.7	23.4	0.92	48.0	40
AGB04028_12U	B	12	7.0~13.2	0.55	13000	0.67	23.8	33.7	1.32	54.0	40
AGB04028_24U	B	24	14.0~26.4	0.27	13000	0.67	23.8	33.7	1.32	54.0	40
AGB04028_12V	B	12	7.0~13.2	0.70	15000	0.70	24.8	41.6	1.64	58.0	40



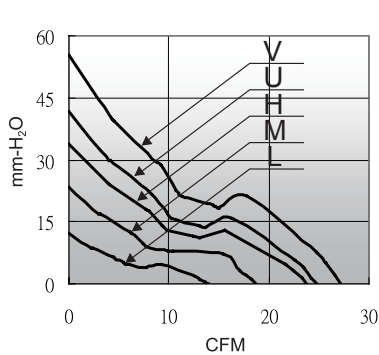


unit:mm

## DC FAN Motor AG-series

## □50×50×10mm

Model	*Bearing System	Rated Voltage	Operating Voltage Range	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level	Weight
Part NO.	B / S / F	V	V	A	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dBA	g
AGE05010_05J	B / S	5	4.0~6.0	0.08	3500	0.19	6.7	1.4	0.05	18.0	20
AGE05010_12J	B / S	12	6.0~13.8	0.05	3500	0.19	6.7	1.4	0.05	18.0	20
AGE05010_05L	B / S	5	4.0~6.0	0.12	4500	0.24	8.6	2.2	0.09	25.0	20
AGE05010_12L	B / S	12	6.0~13.8	0.07	4500	0.24	8.6	2.2	0.09	25.0	20
AGE05010_05M	B / S	5	4.0~6.0	0.16	5500	0.30	10.5	3.5	0.14	30.0	20
AGE05010_12M	B / S	12	6.0~13.8	0.08	5500	0.30	10.5	3.5	0.14	30.0	20
AGE05010_05H	B / S	5	4.0~6.0	0.20	6500	0.36	12.7	4.5	0.18	35.0	20
AGE05010_12H	B / S	12	6.0~13.8	0.10	6500	0.36	12.7	4.5	0.18	35.0	20

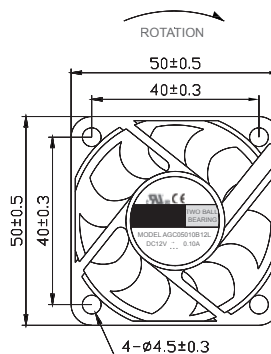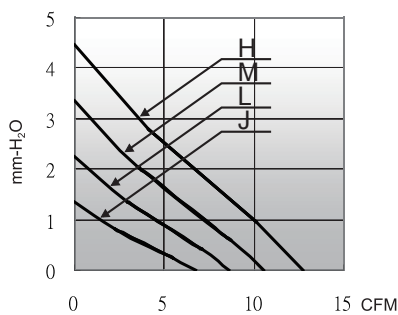

unit:mm

## Japan Magnets, Inc

Head Office / Japan Bldg 4F, 1-1646-2, Kamikawa, Suwa, Nagano, Japan zipcode 392-0021

Tel /+81-266-56-1021

Fax /+81-266-56-1430

HP / <http://www.jmi-motion.com>