


DC FAN Motor AG-series

□120×120×25mm


Model	*Bearing System	Rated Voltage	Operating Voltage Range	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level	Weight
Part NO.	B / S / F	V	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
AGE12025_12J	<u>B</u> <u>E</u> <u>S</u>	12	6.0~13.2	0.08	1200	1.15	40.6	2.1	0.08	19.0	152
AGE12025_24J	<u>B</u> <u>E</u> <u>S</u>	24	14.0~26.4	0.05	1200	1.15	40.6	2.1	0.08	19.0	152
AGE12025_12L	<u>B</u> <u>E</u> <u>S</u>	12	6.0~13.2	0.19	1900	1.97	69.6	3.4	0.14	29.0	152
AGE12025_24L	<u>B</u> <u>E</u> <u>S</u>	24	14.0~26.4	0.15	1900	1.97	69.6	3.4	0.14	29.0	152
AGE12025_12M	<u>B</u> <u>E</u> <u>S</u>	12	6.0~13.2	0.21	2200	2.28	80.6	4.6	0.18	31.0	152
AGE12025_24M	<u>B</u> <u>E</u> <u>S</u>	24	14.0~26.4	0.12	2200	2.28	80.6	4.6	0.18	31.0	152
AGE12025_12H	<u>B</u> <u>E</u> <u>S</u>	12	6.0~13.2	0.25	2500	2.60	90.0	5.3	0.22	36.0	152
AGE12025_24H	<u>B</u> <u>E</u> <u>S</u>	24	14.0~26.4	0.13	2500	2.60	90.0	5.3	0.22	36.0	152
AGE12025_12U	<u>B</u> <u>E</u> <u>S</u>	12	6.0~13.2	0.45	3100	3.38	119.4	7.4	0.29	40.0	152
AGE12025_24U	<u>B</u> <u>E</u> <u>S</u>	24	14.0~26.4	0.31	3100	3.38	119.4	7.4	0.29	40.0	152

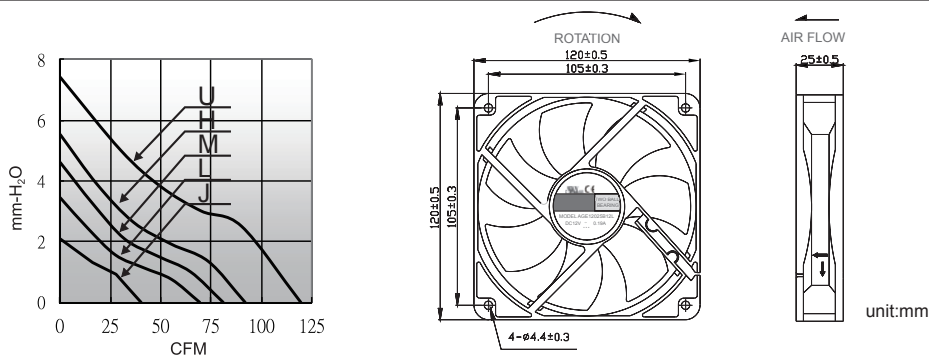

DC FAN Motor AG-series

□120×120×25mm

Model	*Bearing System	Rated Voltage	Operating Voltage Range	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level	Weight
Part NO.	B / S / F	V	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
AGF12025_12L	<u>B</u> <u>S</u>	12	7.0~13.2	0.36	2500	2.60	91.9	5.5	0.22	37.0	165
AGF12025_24L	<u>B</u> <u>S</u>	24	14.0~26.4	0.25	2500	2.60	91.9	5.5	0.22	37.0	165
AGF12025_12M	<u>B</u> <u>S</u>	12	7.0~13.2	0.53	2800	2.92	103.0	6.9	0.27	40.0	165
AGF12025_24M	<u>B</u> <u>S</u>	24	14.0~26.4	0.32	2800	2.92	103.0	6.9	0.27	40.0	165
AGF12025_12H	<u>B</u> <u>S</u>	12	7.0~13.2	0.64	3100	3.23	114.0	8.5	0.33	43.0	165
AGF12025_24H	<u>B</u> <u>S</u>	24	14.0~26.4	0.38	3100	3.23	114.0	8.5	0.33	43.0	165
AGF12025_12U	<u>B</u> <u>S</u>	12	7.0~13.2	0.96	3400	3.54	125.1	10.2	0.40	45.0	165
AGF12025_24U	<u>B</u> <u>S</u>	24	14.0~26.4	0.60	3400	3.54	125.1	10.2	0.40	45.0	165

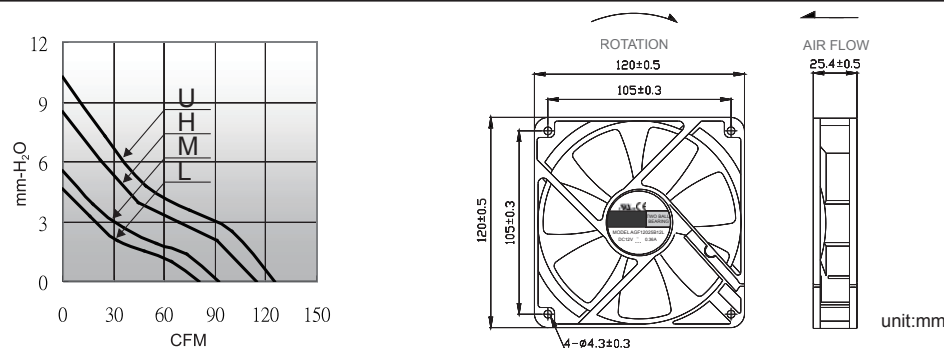

Japan Magnets.,Inc

Head Office / Japan Bldg 4F, 1-1646-2, Kamikawa, Suwa, Nagano, Japan zipcode 392-0021

Tel /+81-266-56-1021

Fax /+81-266-56-1430

HP / <http://www.jmi-motion.com>